at www.infinitysystems.com.

Grilles are included with the "i" version; they are optional for the "cf" version (use Reference model 9633gr). 

VARALY: Reference Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity car audio retailer can help you determine the length of your warranty. To register your product, please visit us audio retailler can help you determine the length of your warranty. To register your product, please visit us

0000111		11 11 11 11 11 11 11	1 111 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
	8Pt6	8pt6	Sensitivity (2.83V, 1m):
	zHy0£ — zH∂4	46Hz – 30KHz	Frequency Response:
	300M	300W	Power Handling, Peak:
	M00T	M001	Power Handling, RMS:
	2 Ohms	2 Ohms	;əouepədwj
GRILLE ONLY for 6" x 9"	6" x 9" 3-Way No GRILLE	6" х 9" 3-Мау	Type:
3633gr	15EE	!EE96	
		SNOIT	SPECIFICA

at www.intinitysystems.com.

Grilles are included with the "i" version; they are optional for the "cf" version (use Beference model 9633gr). 

VARRAVITY: Reference Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity car audio retailer can help you defermine the length of your warranty. To register your product, please visit us audio retailier can be length of your warranty. To register your product, please visit us

	8Pt6	8pt6	Sensitivity (2.83V, 1m):
	76Hz — 30kHz	46Hz – 30KHz	Frequency Response:
	300W	300M	Power Handling, Peak:
	M001	M001	Power Handling, RMS:
	2 Ohms	2 Ohms	lmpedance:
GRILLE ONLY for 6" x 9"	6" x 9" 3-Way NO GRILLE	6" х 9" 3-Мау	Type:
3 <b>9</b> 333 d L	15EE	18896	
		SNOLL	ADIHIDAYS

at www.infinitysystems.com.

9633i 9633cf

Grilles are included with the "i" version; they are optional for the "cf" version (use Reference model 9633gr). Warship the "cf" version (use Reference Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity car audio retailer can help you defermine the length of your warranty. To register your product, please visit us audio retailer can help you defermine the length of your warranty. To register your product, please visit us

9633Gr (8, x 9"	944B 46Hz – 30KHz 300W 100W 2, 2 ms 3-Ms/ NO GRIFFE 30030CH	20098 2084 - 30kHz 3000 30008 40001 50008 40008	Type: Impedance: Power Handling, RMS: Frequency Response: Sensitivity (2,834, 1m):
306330r	15E59e	SNOIT.	SPECIFICA

at www.infinitysystems.com.

Grilles are included with the "I" version; they are optional for the "cf" version (use Reference model 9633gr). WARRALY: Reference Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity car audio retailer can help you defermine the length of your warranty. To register your product, please visit us audio retailer can help you defermine the length of your warranty. To register your product, please visit us

8Pt6	8pt6	Sensitivity (2.83V, 1m):
zH30£ — zH9₽	49Hz - 30KHz	Erequency Response:
300M	300M	Power Handling, Peak:
M001	M001	Power Handling, RMS:
2 Ohms	2 Ohms	lmpedance:
6" x 9" 3-Way no grille	6" x 9" 3-Way	Type:
15EE	18896	
	SNOIL	SPECIFICAT
	6" x 9" 3-Way NO GRILLE 2 Ohms 100W 46Hz — 30KHz	### #################################

at www.infinitysystems.com.

	8Pt6	8pt6	Sensitivity (2.83V, 1m):
	ZH30Z — ZH9 <del>7</del>	46Hz – 30KHz	Frequency Response:
	300W	300W	Power Handling, Peak:
	M001	M001	Power Handling, RMS:
	2 Ohms	2 Ohms	lmpedance:
GRILLE ONLY for 6" x 9"	6" x 9" 3-Way no grille	6" x 9" 3-Way	Type:
1g5£3g	15EE	18896	
		SNOLL	ADITIOARS

aduny returner oun nery you den

Grilles are included with the "i" version; they are optional for the "cf" version (use Reference model 9633gr). WARRAWY: Reference Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity car audio refailer can help you defermine the length of your warranty. To register your product, please visit us audio refailer.

	8Pt6	8pt6	Sensitivity (2.83V, 1m):
	76Hz — 30KHz	49Hz – 30KHz	Ekedneucy Besbouse:
	300W	300M	Power Handling, Peak:
	M001	W001	Power Handling, RMS:
	2 Ohms	2 Ohms	lmpedance:
GRILLE ONLY for 6" x 9"	6" x 9" 3-Way NO GRILLE	6" x 9" 3-Way	Type:
1g883gr	15EE	18896	
		SNOIT	SPECIFICA

at www.infinitysystems.com.

Grilles are included with the "f" version; they are optional for the "cf" version (use Reference model 9633gr). 

VARAMY

PRAUTY: Reference Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity car audio retailer can help you determine the length of your warranty. To register your product, please visit us audio retailer can help you determine the length of your warranty. To register your product, please visit us

	8P†6	8P†6	Sensitivity (2.83V. 1m):
	46Hz — 30KHz	46Hz – 30KHz	Erequency Response:
	300M	300M	Power Handling, Peak:
	M001	M001	Power Handling, RMS:
	2 Ohms	2 Ohms	Jwbeqsuce:
GRILLE ONLY for 6" x 9"	6" x 9" 3-Way NO GRILLE	6" х 9" 3-Wау	Type:
3633gr	f58586	!EE96	
		SNOIT	SPECIFICA

at www.intinitysystems.com.

Grilles are included with the "I" version; they are optional for the "cf" version (use Reference model 9633gr). WARRAMY APRANT Y: Reference Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity car audio refailer, san help you defermine the length of your warranty. To register your product, please visit us audio refailer, san help you defermine the length of your warranty. To register your product, please visit us

	8448	8Pt6	Sensitivity (2.83V, 1m):
	zhy2 — 30kHz	49Hz - 30KHz	Frequency Response:
	300W	300W	Power Handling, Peak:
	M001	M001	Power Handling, RMS:
	2 Ohms	2 Ohms	lmpedance:
GRILLE ONLY for 6" x 9"	6" x 9" 3-Way NO GRILLE	6" x 9" 3-Way	Type:
3 <b>633</b> gr	15EE	18896	
		SNOIT	SPECIFICA

at www.infinitysystems.com.

Grilles are included with the "i" version; they are optional for the "cf" version (use Reference model 9633gr). Wersion of the duration of the speaker's warranty depends on the laws in the country in which it was purchased, Your local Infinity car speaker's warranty depends on the laws in the country in which it was purchased, Your local Infinity car audio retailer can help you defermine the length of your warranty. To register your product, please visit us audio retailer can help you defermine the length of your warranty. To register your product, please visit us

	94dB 46dz – 30kHz 400W	849B 46Hz — 30KHz 300M	Power Handling, Peak: Frequency Response: Sensitivity (2.83V, 1m):
	M001	WOOL	Power Handling, RMS:
	2 Ohms	2 Ohms	Jwbeqsuce:
GRILLE ONLY for 6" x 9"	6" x 9" 3-Way NO GRILLE	6" x 9" 3-Way	Type:
3633gr	15EE	!EE96	
		SNOIT	SPECIFICA

at www.infinitysystems.com.

Grilles are included with the "i" version; they are optional for the "cf" version (use Reference model 9633gr). Specific and the duration of the speaker's warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity car audio refailer, can help you defermine the length of your warranty. To register your product, please visit us audio refailer, can help you defermine the length of your warranty. To register your product, please visit us

	8Pt6	8P46	Sensitivity (2.83V, 1m):
	zH30k — zH9 <del>1</del>	49Hz – 30KHz	Frequency Response:
	300M	300W	Power Handling, Peak:
	100W	M001	Power Handling, RMS:
	2 Ohms	2 Ohms	lmpedance:
GRILLE ONLY for 6" x 9"	6" x 9" 3-Way NO GRILLE	6" x 9" 3-Way	Type:
3633gr	35£86	18896	
		SNOIT	SPECIFICA

moo.smatsysystems.com.


Grilles are included with the "i" version; they are optional for the "cf" version (use Reference model 9633gr). WAARALY: Reference Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity car audio refailer, can help you defermine the length of your warranty. To register your product, please visit us audio refailer, can help you defermine the length of your warranty. To register your product, please visit us

000011	, .		119 // 11 91 11			
			8pt6	8	P <del>†</del> 6	Sensitivity (2.83V, 1m):
			46Hz – 30KHz	30KHZ	- ZH9†	Frequency Response:
			300W	W	300	Power Handling, Peak:
			M001	W	1001	Power Handling, RMS:
			2 Ohms	SW	7 ОРІ	lmpedance:
"8 x "8 101 YJ		- 3	6" x 9" 3-Way No GRILLI	8-Way	6" X 9"	Type:
33gr	96		35£86	iS:	£96	
				12	NOI-	SPECIFICAT


at www.infinitysystems.com.

Grilles are included with the "i" version; they are optional for the "cf" version (use Reference model 9633gr). Specifics are included with the "i" version of the duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity car audio refailer can help you determine the length of your warranty. To register your product, please visit us audio refailer can help you determine the length of your warranty. To register your product, please visit us

'(mf VER C) vtivitiona?	арть	8448		
Frequency Response:	46Hz – 30KHz	zH30k — zH9 <del>1</del> /		
Power Handling, Peak:	300W	300M		
Power Handling, RMS:	M001	M001		
jwbeqsuce:	2 Ohms	2 Ohms		
Type:	6" х 9" 3-Wау	6" x 9" 3-Way no Grille	GRILLE ONLY for 6" x 9"	
	!8896	f5858	3633gr	
SPECIFICA <sup>-</sup>	SNOIT			



RT (I-W)	4.30	4.30
DCR (ohms)	2.30	2.30
Mms (g)	21.70	21.70
Sd (sq cm)	236.4	236.4
Cms (µm/N)	442	442
Vas (I)	34.69	34.69
Fs (Hz)	51.4	51.4
Qes	0.87	0.87
Qms	6.34	6.34
<b>Q</b> t	0.77	0.77

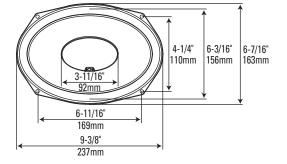

SPECIFICATIONS							
	9633i	9633cf	9633gr				
Type:	6" x 9" 3-Way	6" x 9" 3-Way NO GRILLE	GRILLE ONLY for 6" x 9"				
Impedance:	2 Ohms	2 Ohms					
Power Handling, RMS:	100W	100W					
Power Handling, Peak:	300W	300W					
Frequency Response:	46Hz - 30kHz	46Hz - 30kHz					
Sensitivity (2.83V, 1m):	94dB	94dB					

Grilles are included with the "i" version; they are optional for the "cf" version (use Reference model 9633gr).

VARRANTY: Reference Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity car audio retailer can help you determine the length of your warranty. To register your product, please visit us at www.infinitysystems.com.

#### **SPECIFICATIONS**

	96331	9633ct	9633gr
Type:	6" x 9" 3-Way	6" x 9" 3-Way NO GRILLE	GRILLE ONLY for 6" x 9"
Impedance:	2 Ohms	2 Ohms	
Power Handling, RMS:	100W	100W	
Power Handling, Peak:	300W	300W	
Frequency Response:	46Hz – 30kHz	46Hz – 30kHz	
Sensitivity (2,83V, 1m):	94dB	94dB	

Grilles are included with the "i" version; they are optional for the "cf" version (use Reference model 9633gr).

WARRANTY: Reference Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity car audio retailer can help you determine the length of your warranty. To register your product, please visit us at www.infinitysystems.com.

Designed and engineered in the USA. Conception et design aux É.U.A.

A valid serial number is required for warranty coverage. Un numéro de série valable est exigé pour la couverture de la garantie. Features, specifications and appearance are subject to change without notice.

reatures, specifications and appearance are subject to change without notice. Les dispositifs, les caractéristiques et l'aspect sont sujets au changement sans communication préalable.

Harman International, Consumer Division, 8500 Balboa Boulevard, Northridge, CA 91329 USA


www.infinitysystems.com


© 2009 Harman International Industries, Incorporated. All rights reserved. Tous droits réservés. • Part No. REF96330M1/09
Infinity is a trademark of Harman International Industries, Incorporated, registered in the United States and/or other countries.
Infinity est une marque commerciale de Harman International Industries, Incorporated, déposée aux États-Unis et/ou dans d'autres pays.


H Harman International






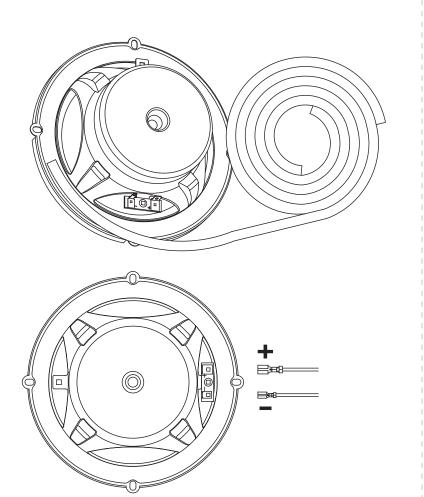












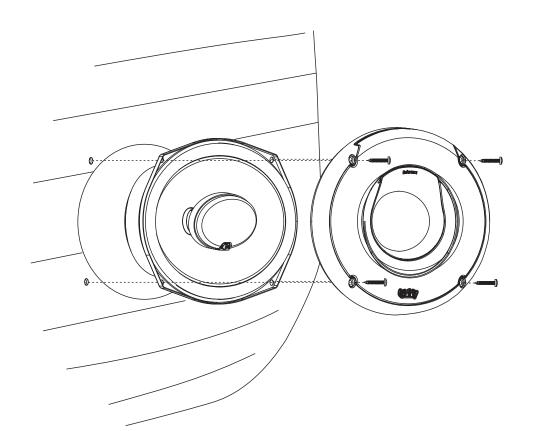

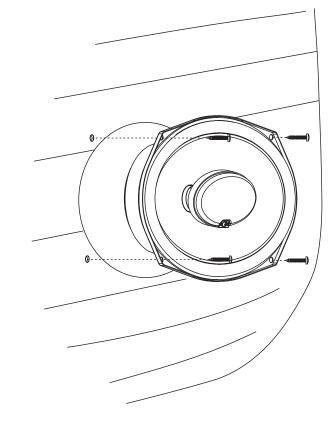

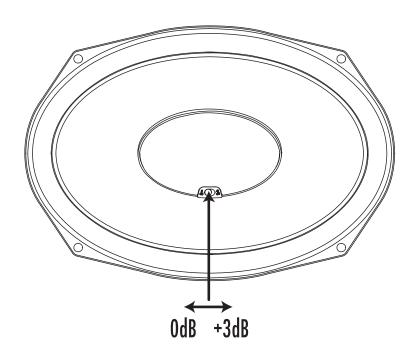

## TWEETER-LEVEL CONTROL

This speaker system is equipped with a tweeter-level switch. The normal setting for this switch is the "OdB" position, which provides an apparently "flat" response. Tweeter

output may be increased according to the user's preference, or to compensate for off-axis placement (where the speaker does not directly face the listening position), by setting the switch to the "+3dB" position.

## TWEETER-LEVEL CONTROL

This speaker system is equipped with a tweeter-level switch. The normal setting for this switch is the "OdB" position, which provides an apparently "flat" response. Tweeter output may be increased according to the user's preference, or to compensate for offaxis placement (where the speaker does not directly face the listening position), by setting the switch to the "+3dB" position.

## TWEETER-LEVEL CONTROL

This speaker system is equipped with a tweeter-level switch. The normal setting for this switch is the "OdB" position, which provides an apparently "flat" response. Tweeter output may be increased according to the user's preference, or to compensate for offaxis placement (where the speaker does not directly face the listening position), by setting the switch to the "+3dB" position.

### TWEETER-LEVEL CONTROL

This speaker system is equipped with a tweeter-level switch. The normal setting for this switch is the "OdB" position, which provides an apparently "flat" response. Tweeter output may be increased according to the user's preference, or to compensate for offaxis placement (where the speaker does not directly face the listening position), by setting the switch to the "+3dB" position.

# TWEETER-LEVEL CONTROL

This speaker system is equipped with a tweeter-level switch. The normal setting for this switch is the "OdB" position, which provides an apparently "flat" response. Tweeter output may be increased according to the user's preference, or to compensate for offaxis placement (where the speaker does not directly face the listening position), by setting the switch to the "+3dB" position.

### TWEETER-LEVEL CONTROL

This speaker system is equipped with a tweeter-level switch. The normal setting for this switch is the "OdB" position, which provides an apparently "flat" response. Tweeter output may be increased according to the user's preference, or to compensate for offaxis placement (where the speaker does not directly face the listening position), by setting the switch to the "+3dB" position.

### TWEETER-LEVEL CONTROL

This speaker system is equipped with a tweeter-level switch. The normal setting for this switch is the "OdB" position, which provides an apparently "flat" response. Tweeter output may be increased according to the user's preference, or to compensate for offaxis placement (where the speaker does not directly face the listening position), by setting the switch to the "+3dB" position.

# TWEETER-LEVEL CONTROL

This speaker system is equipped with a tweeter-level switch. The normal setting for this switch is the "OdB" position, which provides an apparently "flat" response. Tweeter output may be increased according to the user's preference, or to compensate for offaxis placement (where the speaker does not directly face the listening position), by setting the switch to the "+3dB" position.

## TWEETER-LEVEL CONTROL

This speaker system is equipped with a tweeter-level switch. The normal setting for this switch is the "OdB" position, which provides an apparently "flat" response. Tweeter output may be increased according to the user's preference, or to compensate for offaxis placement (where the speaker does not directly face the listening position), by setting the switch to the "+3dB" position.

## TWEETER-LEVEL CONTROL

This speaker system is equipped with a tweeter-level switch. The normal setting for this switch is the "OdB" position, which provides an apparently "flat" response. Tweeter output may be increased according to the user's preference, or to compensate for offaxis placement (where the speaker does not directly face the listening position), by setting the switch to the "+3dB" position.

# TWEETER-LEVEL CONTROL

This speaker system is equipped with a tweeter-level switch. The normal setting for this switch is the "OdB" position, which provides an apparently "flat" response. Tweeter output may be increased according to the user's preference, or to compensate for offaxis placement (where the speaker does not directly face the listening position), by setting the switch to the "+3dB" position.

### TWEETER-LEVEL CONTROL

This speaker system is equipped with a tweeter-level switch. The normal setting for this switch is the "OdB" position, which provides an apparently "flat" response. Tweeter output may be increased according to the user's preference, or to compensate for offaxis placement (where the speaker does not directly face the listening position), by setting the switch to the "+3dB" position.

## TWEETER-LEVEL CONTROL

This speaker system is equipped with a tweeter-level switch. The normal setting for this switch is the "ddB" position, which provides an apparently "flat" response. Tweeter output may be increased according to the user's preference, or to compensate for offaxis placement (where the speaker does not directly face the listening position), by setting the switch to the "+3dB" position.

# TWEETER-LEVEL CONTROL

This speaker system is equipped with a tweeter-level switch. The normal setting for this switch is the "OdB" position, which provides an apparently "flat" response. Tweeter output may be increased according to the user's preference, or to compensate for offaxis placement (where the speaker does not directly face the listening position), by setting the switch to the "+3dB" position.